


XS Absolute®

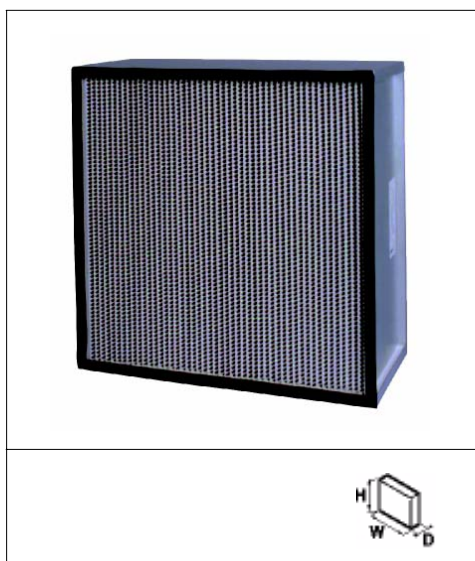

Advantages

- Individually tested HEPA/ULPA filter in an enclosure assembled without penetrating fasteners
- Unique seamless poured-in-place gasket ensures leak free performance when installed into housings or built-up filter banks

Description: HEPA/ULPA grade filter in an all metal 16-gauge enclosing frame.

Typical applications: Built-up filter banks, rooftops, and air handlers in medical facilities, pharmaceuticals, and clean process manufacturing.

Efficiency: 99.97% at 0.3 μ to 99.9995% at 0.3 μ .

Media: Microfine glass media formed into pleats separated by corrugated aluminum separators.

Recommended final pressure drop: Consult factory. Rule of thumb: change filter when the initial pressure drop doubles.

Temperature: Maximum continuous operating temperature of 175° F (80° C).

Ratings: Tested in accordance with IEST Recommended Practice for Testing HEPA Filters. UL 900 Class 1.

See Product Sheet 1801 for more details.

Model Number	Efficiency	IEST Type	Nominal Size (inches)	Airflow Capacity @ 1.0" w.g.	Media Area (sq. ft.)	Shipping Weight (lbs.)
01XS-12Z12Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	12 x 12 x 11.50	230	33.4	22.4
01XS-23F11F12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	23.38 x 11.38 x 11.50	460	64.5	28.8
01XS-24Z12Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	24 x 12 x 11.50	500	69.3	29.7
01XS-11F23F12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	11.38 x 23.38 x 11.5	460	64.5	32.4
01XS-12Z24Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	12 x 24 x 11.50	500	69.3	33.3
01XS-23F23F12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	23.38 x 23.38 x 11.50	1020	143.6	42.7
01XS-24Z24Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 μ	H	24 x 24 x 11.50	1080	153.6	43.8
12XS-12Z12Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	12 x 12 x 11.50	230	33.4	22.4
12XS-23F11F12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	23.38 x 11.38 x 11.50	460	64.5	28.8
12XS-24Z12Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	24 x 12 x 11.50	500	69.3	29.7
12XS-11F23F12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	11.38 x 23.38 x 11.5	460	64.5	32.4
12XS-12Z24Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	12 x 24 x 11.50	500	69.3	33.3
12XS-23F23F12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	23.38 x 23.38 x 11.50	1020	143.6	42.7
12XS-24Z24Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 μ	J	24 x 24 x 11.50	1080	153.6	43.8
13XS-12Z12Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	12 x 12 x 11.50	190	33.4	22.4
13XS-23F11F12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	23.38 x 11.38 x 11.50	370	64.5	28.4
13XS-24Z12Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	24 x 12 x 11.50	410	69.3	29.7
13XS-11F23F12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	11.38 x 23.38 x 11.50	370	64.5	32.4
13XS-12Z24Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	12 x 24 x 11.50	410	69.3	33.3
13XS-23F23F12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	23.38 x 23.38 x 11.50	840	143.6	42.7
13XS-24Z24Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 μ	F	24 x 24 x 11.50	890	153.6	43.8

Replace ** in model number with 00 for no gasket, 1D for 1 gasket downstream, 1U for one gasket upstream, or 1B for a gasket on both sides.